

ISO 20ft Container IP-2



TRANSRAD
RESPONSIBLE LOGISTICS



CLASSIFICATION

- Type IP-2
- IAEA SSR 6, 2018 Edition

ALLOWED CONTENTS

- Solid materials
- SCO-I, II materials
- LSA I and II materials
- LSA-III materials (exclusive use only)

Type IP-2 packaging for transport and storage of surface contaminated objects or low specific activity material, like contaminated tools, dismantled components, waste, ... Allowed transport modes: by land, sea or air. The roof can be removed to load with cranes, rails are added in the floor and on the sides of the container to stow the content. The internal surfaces can be easily decontaminated (full stainless steel floor, no use of wood).

Dimensions



	External dimensions	Inner dimensions
Length	6 058 mm	5 863 mm
Width	2 438 mm	2 326 mm
Height	2 591 mm	2 332 mm

Weights

	Kg	Lbs
Tara	3 900 kg	8 598 lbs
Payload	26 580 kg	58 599 lbs
Gross weight	30 480 kg	67 197 lbs

Openings

	Rear doors	Roof
Length	-	5 586 mm
Width	2 266 mm	2 226 mm
Height	2 338 mm	-

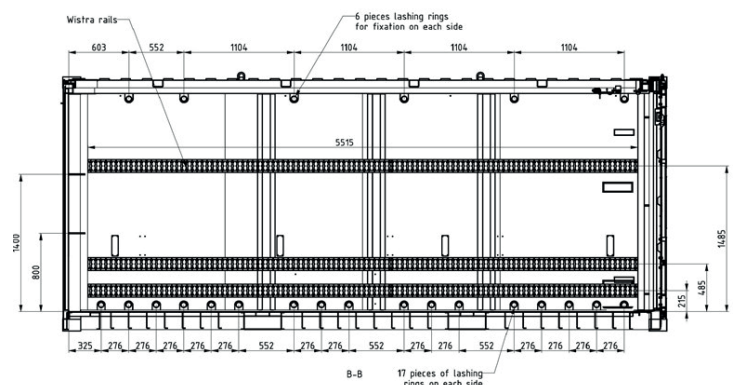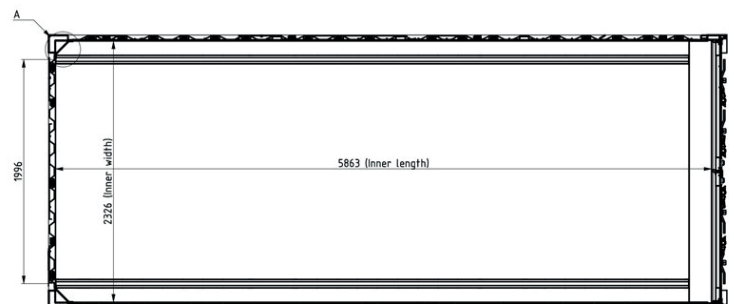

For more information on this packaging or other packagings, please contact us:
Transrad S.A. • Avenue de l'Espérance 1 - 6220 Fleurus (Belgium)
 Tel.: +32 (0)71 82 97 59 • info@transrad.be

www.transrad.be